


SAUCE DEPOSITOR

Encoder controlled gear pump filler with nondrip outlet nozzles, giving high accuracy across a wide range of speeds and weights. Ideally suited for meal make-up systems and general sauce depositing. Available in single or multi-lane, free standing or can be fitted to new or existing production lines.



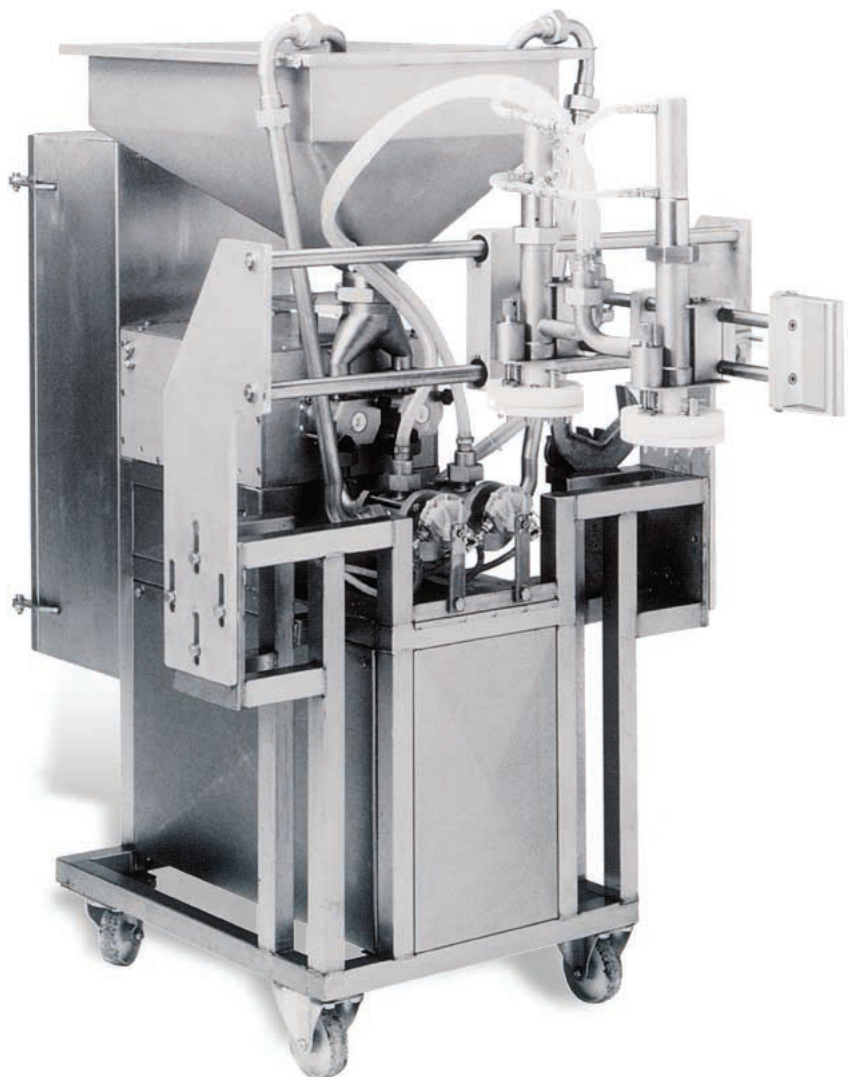

SAUCE DEPOSITOR SPECIFICATION

- SPEED:** Up to 60 cycles per minute Large Volume Deposit may reduce speed to approximately 30 cycles per minute per lane.
- CAPACITY:** 3 Litres per minute depositing per lane.
- HOPPER:** 50 Litres.
- SPARES:** Standard spares kits are available and readily obtainable from our Spares Department.
- CONSTRUCTION:** All stainless steel with food quality plastics and any aluminium components hard anodised.
- HYGIENE:** The depositor may be fully dismantled and safely hosed.
- OPERATION:** Runs continuously back to Hopper with divertor valve to non-drip outlet. Speed is adjustable on Potentiometer Knob, and volume control is by Digital Counter Encoder, prime function, and will accept food pedal or outside control signal.
- ACCURACY:** The Depositors are extremely accurate by volume and weight range to within plus or minus 1 gramme are normal.
- TECHNICAL DATA:** Compressed air supply 80 psi, 8-12 cfm per cycle. Fitted with 6mm filter pressure regulator and lubricator.
- ELECTRICAL CONTROL OPTIONS:**
- Variable speed inverter controlled in ~ 415/240 supply voltage.
 - Fixed speed ~ 415 supply voltage.
 - Control voltage ~ 110 volt.

